

CV-401D

DVI-D to CVBS Scaler Box

Operation Manual

Draft Manual



• **Disclaimers**

The information in this manual has been carefully checked and is believed to be accurate. Cypress Technology assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

Cypress Technology assumes no responsibility for any inaccuracies that may be contained in this document. Cypress also makes no commitment to update or to keep current the information contained in this document.

Cypress Technology reserves the right to make improvements to this document and/or product at any time and without notice.

• **Copyright Notice**

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means - electronic, mechanical, magnetic, optical, chemical, manual, or otherwise - without express written permission and consent from Cypress Technology.

© Copyright 2009 by Cypress Technology. All Rights Reserved.
Version 1.0 October 2009

• **Trademark Acknowledgments**

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.

• **Safety Precautions**

Please read all instructions before attempting to unpack or install or operate this equipment, and before connecting the power supply. Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through module openings or empty slots, as you may damage parts.
- Do not attach the power supply cabling to building surfaces.
- Do not allow anything to rest on the power cabling or allow it to be abused by persons walking on it.
- To protect the equipment from overheating, do not block the slots and openings in the module housing that provide ventilation.

• **Revision History**

<u>Version No</u>	<u>Date</u>	<u>Summary of Change</u>
RDV1	20110328	Preliminary Release

Table of Contents

1. Introduction.....	1
2. Applications.....	1
3. Package Contents	1
4. System Requirements.....	1
5. Features	1
6. Specifications	2
7. Operation Controls and Functions.....	3
7.1 Top Panel	3
7.2 Left Panel	3
7.3 Right Panel.....	4
8. OSD Menu	4
9. Connection and Installation.....	6

1. Introduction

The DVI to CVBS Scaler Box is designed to convert digital signal from DVI-D source to analog CVBS signal of NTSC or PAL system. The device is HDMI 1.2 & DVI 1.0 compliant and it features many great functions such like 3D noise reduction, frame rate conversion, adaptive contrast enhancement... and etc. Further, a simplify OSD function is available allowing user with easy viewing on the displaying status.

2. Applications

- DVI signal display on TV monitor
- Graphic Card signal display on CRT display
- Displaying PC signal on the LCD display

3. Package Contents

- DVI-D to CVBS Scaler Box
- Power Adaptor
- Operation Manual

4. System Requirements

Input source equipment such as PC/NB signal with DVI cable and output to TV with CVBS input jack and connection cable.

5. Features

- DVI 1.0 compliant
- Converts video signal from DVI-D source to NTSC or PAL signal
- Accepts a wide range of DVI-D input resolution from 480p to 1080p@60Hz and PC from VGA to WUXGA@60HzRB
- Output picture size Underscan / Overscan
- 3D noise reduction in both temporal and spatial domain
- Frame rate conversion
- Adaptive contrast enhancement
- OSD Display
- Overscan and underscan adjustment
- Phase and Aspect adjustment
- No software installation require
- Compact and elegant design

Note: This product does not process HDCP input. When receiving content that has HDCP encryption there will be no video output.

6. Specifications

Input Port	1 x DVI-D
Output Ports	1 x CVBS
Output Video	NTSC/PAL
ESD Protection	Human body model: $\pm 8\text{kV}$ (air-gap discharge) $\pm 6\text{kV}$ (contact discharge)
Dimensions (mm)	64 (W) x 104 (D) x 26 (H)
Weight (g)	120
Chassis Material	Plastic
Silkscreen Color	White
Operating Temperature	0°C~40°C / 32°F~104°F
Storage Temperature	-20°C ~60°C / -4°F~140°F
Power Consumption	3W
Relative Humidity	20 ~90%RH (non-condensing)


7. Support Input Timing

480p	60
576i	50
576p	50
720p	50,60
1080i	50,60
1080p	50,60
640x480	60,72,75,85
720x400	70
800x600	56,60,72,75,85
1024x768	60,70,75,85
1152x864	70,75,85
1280x720	60
1280x768	60RB,60
1280x800	60RB,60
1280x960	60
1280x1024	60
1366x768	60RB,60
1400x1050	60RB,60
1440x900	60RB,60
1600x1200	60
1680x1050	60RB,60
1920x1200	60RB

Note: When the input timing is not supported, the OSD will display "IN not Support".


7. Operation Controls and Functions

7.1 Top Panel

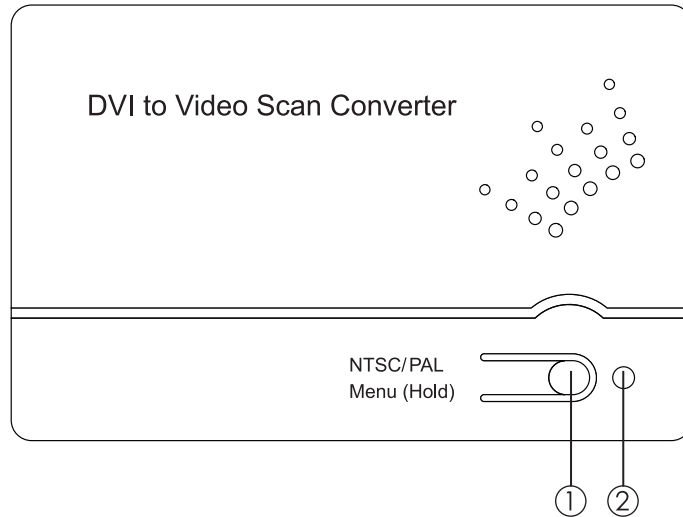


- ①. NTSC/PAL MENU (3SEC): Press this button to bring up the OSD which will display the input timing and output TV system information. While the OSD is still displaying press the button again to switch output TV system from NTSC to PAL or from PAL to NTSC. Press this button for 3 second the OSD will bring up the selection menu. Press it sequentially to select the desire setting.
- ②. Power LED: This LED will illuminate in RED when the power is connected with the power supply.

7.2 Left Panel

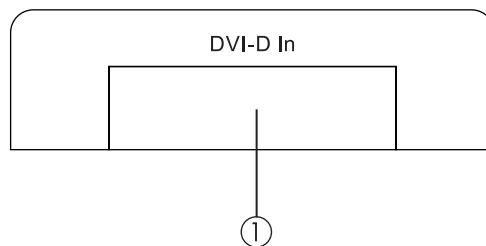

- ①. DVI-D IN: This slot is to connect with source equipment such as PC or laptop for input DVI signal with DVI cable.

7.3 Right Panel

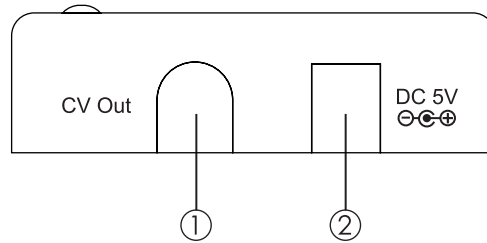


- ①. CV OUT: This slot is to connect with display TV or monitor with RCA cable for output image display.
- ②. DV5V: Plug the 5V DC power supply included in the package into the unit and connect the adaptor to AC wall outlet.

8. OSD Menu

IN	1280 x 960 @60 (Input Timing)
OUT	NTSC (Output TV System)
NTSC	
PAL	
Underscan 1	
Underscan 2	
Overscan	
Aspect Adj	Full Screen
	Letterbox
	Pan & Scan
	Auto TV 4:3
	Auto TV 16:9

Below is the example of the scan selection result.

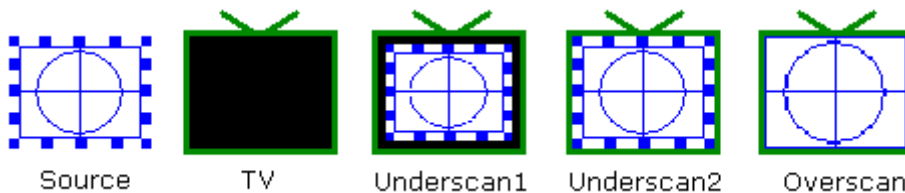

Aspect Adjustment: There are total of 5 different adjustments under Aspect and they are Full Screen, Letterbox, Pan & Scan and Auto TV 4:3 & 16:9.

Full Screen: To allow the image to fill out the screen of the TV.

















Letterbox: To fit the output image closer to the input source, compressed the upper and lower image.

Pan & Scan: To fit the output image closer to the input source, compressed the right and left image.


Auto TV 4:3: Allowing the device to auto detect input source signal of 4:3 or 16:9 and make the auto adjustment.

Auto TV 16:9: Allowing the device to auto detect input source signal of 16:9 or 4:3 and make the auto adjustment.

Blow is the sample chart of the selection result:

Aspect Adj		Full Screen	Letterbox	Pan&Scan	Auto TV 4:3	Auto TV 16:9
Source	TV					
 4:3	 4:3		X	X		X
	 16:9		X		X	
 16:9	 4:3			X		X
	 16:9		X	X	X	

9. Connection and Installation

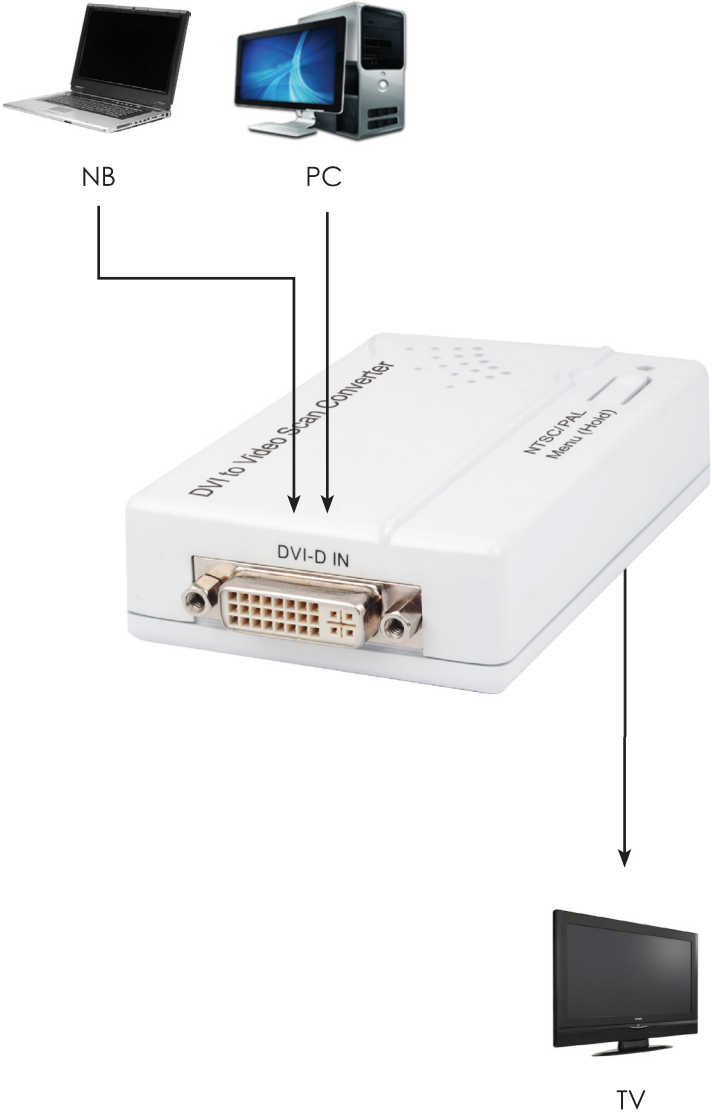

Acronyms



Acronym	Complete Term
CRT	Cathode Ray Tube
HDMI	High-Definition Multimedia Interface
LCD	Liquid Crystal Display
NTSC	National Television System Committee
PAL	Phase Alternating Line



CYPRESS TECHNOLOGY CO., LTD.
Home page: <http://www.cypress.com.tw>

MPM-CV401H