

4x1

PC/HDTV Switcher

Operation Manual



CPCD-41AR

Applications:

Cypress CPCCD-41AR PC/HDTV is perfect solution for switching between various PC/HDTV sources such as PCs, DVD... to share one display monitor, TV or projector with resolution up to WUXGA/1080p.

Features:


- LED indicators
- IR remote control.
- Supports high resolution input:
PC: VGA, SVGA, XGA, SXGA, UXGA(1600x 1200) and WUXGA(1920x1200), & HDTV: 480i, 576i, 480p, 576p, 720p, 1080i and 1080p.
- Bandwidth: 650 MHz.
- Plug and play, easy to install and operate.
- Built-in advance circuit ensures a smooth transition when switching from one PC/HD source into another.
- RS-232 interface allows control from a distant device.
- Ideal for presentation and trade show interaration.
- Audio format: L/R analog.

Packaae includes:

- CPCCD-41AR unit.
- IR remote control
- 5VDC power supply, center +
- User manual
- A 3V lithium battery
- One set of 3.5mm phone jack to 2R audio cable.


Operation Controls and Functions

Front Panel

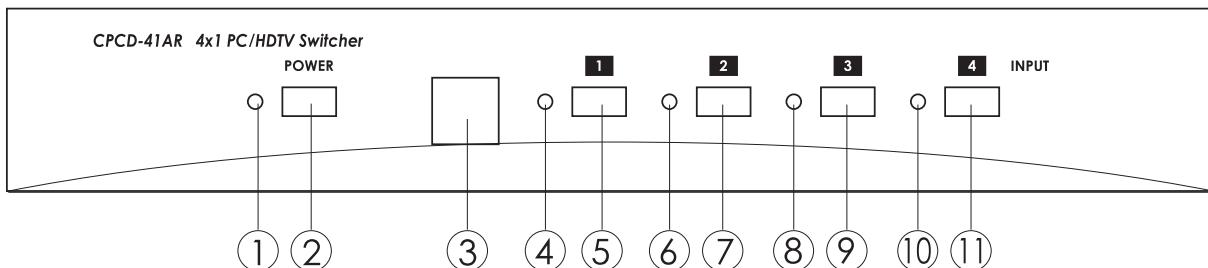

1. Power indicator LED.
2. Power ON/OFF switch: Push the button to turn ON/OFF the power.
3. IR sensor: Infrared remote control sensor.
4. Input 1 indicator LED .
5. Input 1 switch: Push the button, LED lights up, source 1 is selected.
6. Input 2 indicator LED.
7. Input 2 switch: Push the button, LED lights up, source 2 is selected.
8. Input 3 indicator LED .
9. Input 3 switch: Push the button, LED lights up, source 3 is selected.
10. Input 4 indicator LED.
11. Input 4 switch: Push the button, LED lights up, source 4 is selected.

Rear Panel

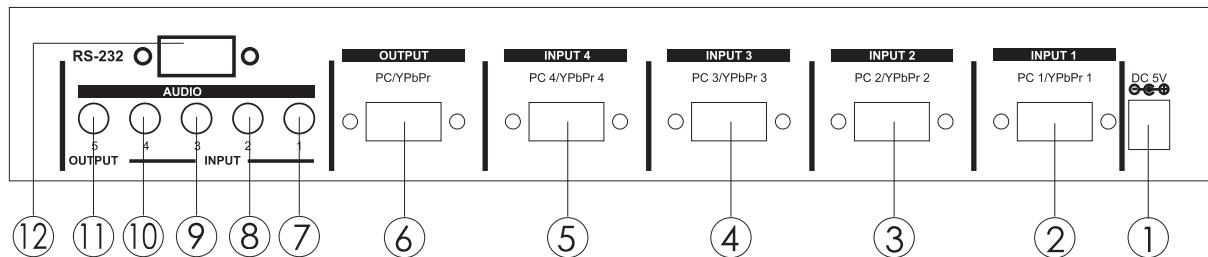


1. DC 5V: 5 Volt, 5W DC input , center +.
2. Input 1 connector: Input connector for PC 1/YPbPr 1.
3. Input 2 connector: Input connector for PC 2/YPbPr 2.
4. Input 3 connector: Input connector for PC 3/YPbPr 3.
5. Input 4 connector: Input connector for PC 4/YPbPr 4.
6. Output connector: Output connector for PC/YPbPr.
7. Audio input 1 connector: Audio input connector for Audio (L+R) 1 via 3.5mm phone jack to 2R audio cable.
8. Audio Input 2 connector: Audio input connector for Audio (L+R) 2 via 3.5mm phone jack to 2R audio cable.
9. Audio input 3 connector: Audio input connector for Audio (L+ R) 3 via 3.5mm phone jack to 2R audio cable.
10. Audio input 4 connector: Audio input connector for Audio (L+R) 4 via 3.5mm phone jack to 2R audio cable.
11. Audio output connector: Audio output connector for Audio(L+R) via 3.5mm phone jack to 2R audio cable.
12. RS-232 interface: DB-9 female connector for connectina to your other control console for remote control.

Remote Control

1. Power: Switch between power ON and Standby.
2. Press button 1 to select source 1.
3. Press button 2 to select source 2.
4. Press button 3 to select source 3.
5. Press button 4 to select source 4.

Note: Replacement battery can be found at a local electronic retail store.

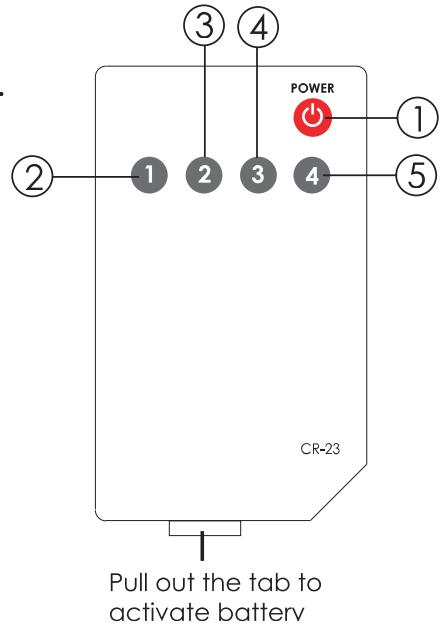


Specifications:


Input	PC/YPbPr:4	RGB: 0.7Vp-p or 1 Vp-p with sync 75 ohm /HD(TTL): 5Vp-p 10 K ohm
	Analog Audio: 4 (L/R)	2Vrms max 47 k ohm
Output	PC/YPbPr:1	RGB: 0.7Vp-p or 1 Vp-p with sync 75 ohm /HD(TTL): 5Vp-p 10k ohm
	Analog Audio: 1 (L/R)	2 Vrms max 47 k ohm
PC /YPbPr Bandwidth	650 MHz (-3db)	
Differential gain	0.05%	
Differential phase	0.05 degrees	
Power consumption	5 Watts (max.)	
Power	5V 1A AC adaptor	
Dimensions	292(W)x 73(D) x 44(H)mm	
Unit weight	1.5Kgs	

Installation and Connection

1. 4 x PC input. 1x PC output

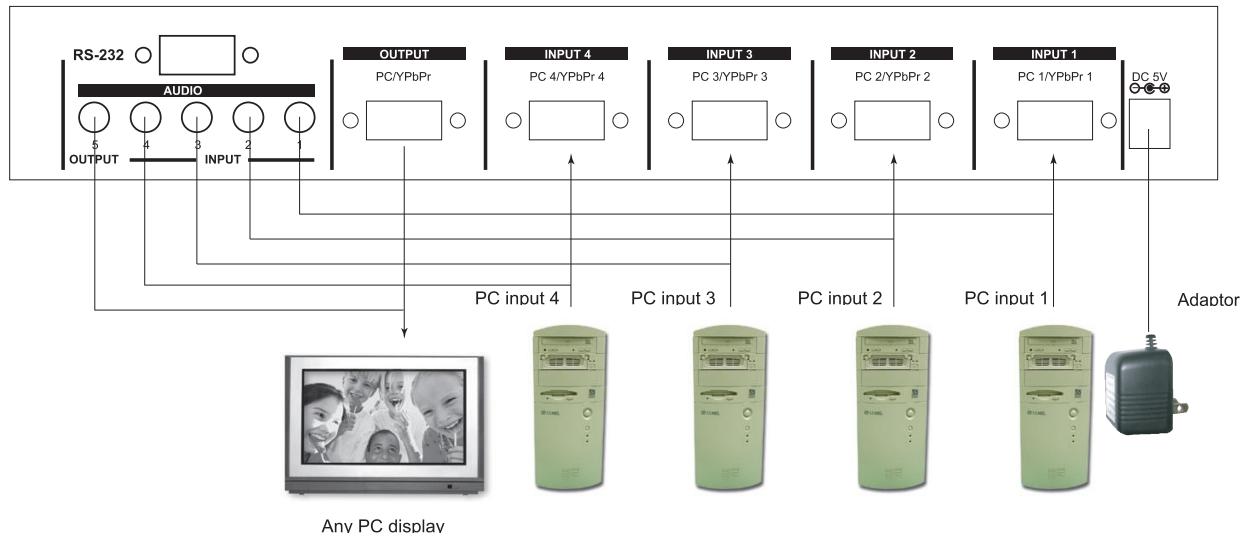

2. 4 x HD input. 1x HD output

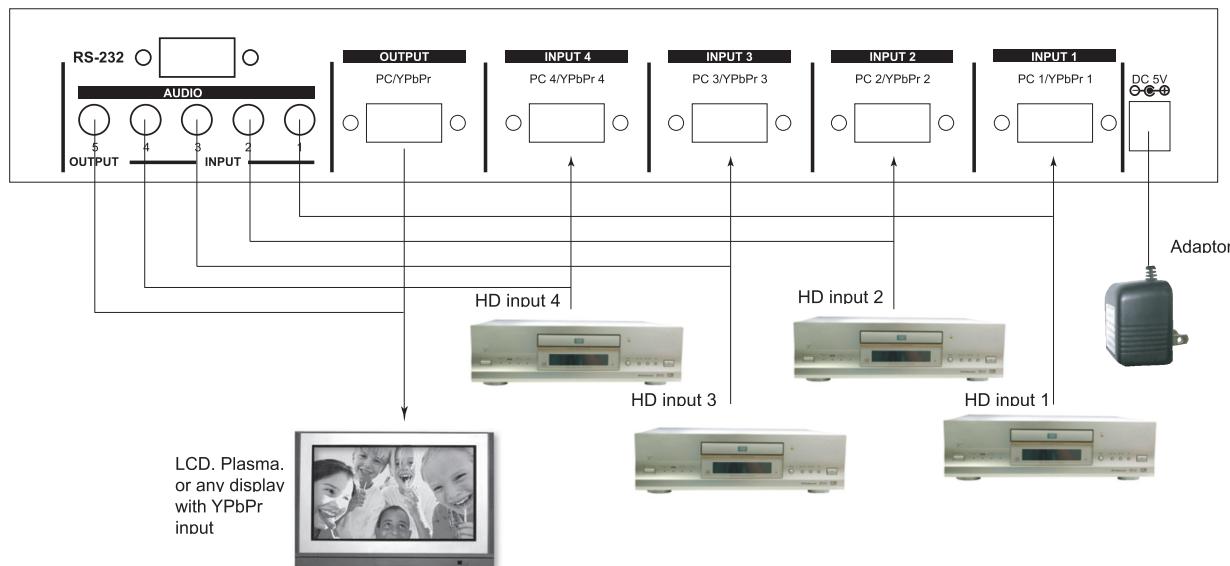

CPCD-41AR RS-232 Remote Control Protocol

* The connection between CPCD-41AR and remote controller with **RS-232 modem cable**.

Pins definition of modem cable

CPCD-41AR			Remote Controller	
PIN	Definition		PIN	Definition
1	NC		1	NC
2	TxD	→	2	RxD
3	RxD		3	TxD
4	NC		4	NC
5	GND	←	5	GND
6	NC		6	NC
7	NC		7	NC
8	NC		8	NC
9	NC		9	NC

* RS-232 transmission format:

Baud Rate : 9600 bps

Data Bit : 8 Bits

Parity: None

Stop Bit: 1 bit

* Command :

Command Code	Comment
"I" + "1"	PORT 1 ON
"I" + "2"	PORT 2 ON
"I" + "3"	PORT 3 ON
"I" + "4"	PORT 4 ON
"P" + "1"	POWER ON
"P" + "0"	POWER OFF

20070713 MPM-CPCD41AR